




GENUINE DANFORTH® STANDARD® MARINE ANCHORS

TRADITIONAL, SUPERIOR HOLDING POWER

THIS ANCHOR HAS THE TRADITIONAL HOLDING POWER WHICH HAS ALWAYS BEEN ASSOCIATED WITH DANFORTH STANDARD ANCHORS. THE SHANK IS MADE OF HIGH STRENGTH STEEL. THE STEEL FLUKES ARE STRONG AND WIDE. EACH ANCHOR HAS A HOT DIPPED GALVANIZED COATING FOR LONG LASTING PROTECTION.

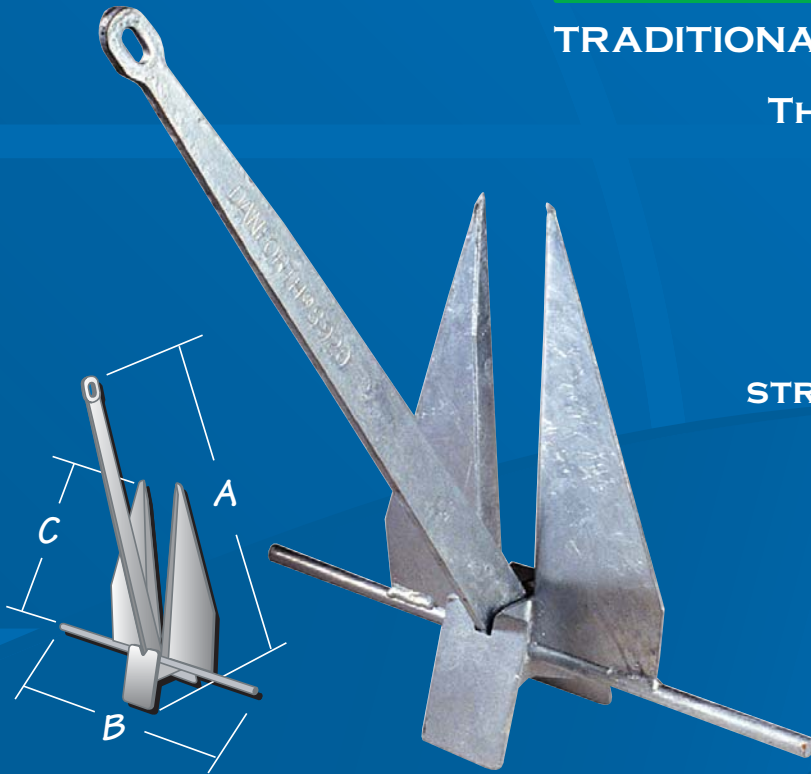

Part Number	Model	Holding Power (lbs)	Weight (lbs)	Boats Up To: (20K Winds*)	Chain Dia.	A Anchor Height	B Stock Length	C Fluke Length
94010	S®160	160	3.5	10 Ft.	3'- 3/16"	17-1/4"	13"	9"
94011	S®300	300	5	17 Ft.	3'- 3/16"	19-1/2"	14-3/4"	10-1/2"
94012	S®600	600	9	27 Ft.	3'- 3/16"	24"	18-1/4"	12"
94013	S®920	920	14	31 Ft.	4'- 1/4"	28-1/4"	21-1/2"	14-1/4"
94014	S®1300	1300	16	36 Ft.	4'- 3/16"	31-3/4"	24"	16-1/2"
94015	S®1600	1600	25	40 Ft.	5'- 5/16"	35"	26-3/4"	19"
94016	S®2000	2000	43	45 Ft.	6'- 3/8"	40-1/4"	31"	22"
94017	S®3000	3000	70	55 Ft.	8'- 1/2"	50"	38"	26-1/2"
94018	S®3500	3500	100	60 Ft.	8'- 5/8"	54"	41"	28-3/4"

* Tested under equivalent conditions and average bottom conditions

TIE DOWN ENGINEERING • 5901 Wheaton Drive • Atlanta GA, 30336
www.tiedown.com • (404) 344-0000 • FAX (404) 349-0401



© Registered Trademark of TIE DOWN ENGINEERING, Inc. Atlanta, Georgia 30336 www.danforthanchors.com

050902,310